

SANOCA FIRE DEPT.


NFPA 1410 Evolutions

Standard on Training for Initial Attack


Offensive Single Engine: Handline-Forward Lead Out



200 feet 1 3/4" attack line

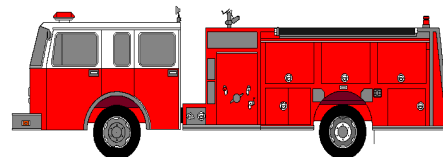

300 foot 5" forward lay



FIRE HYDRANT

Objective To place a initial attack line (1 3/4) of min. 150' and a back-up line in-service, using units and staffing of the average number of personnel that ordinarily respond.

EVOLUTION DESCRIPTION:

A forward lay using one engine and one supply line. Deploy 300' of 5" hose from hydrant to fire scene. Crew shall deploy 1 hose line capable of flowing a minimum of 95 GPM within 3 minutes from start of evolution. Engine shall be permitted to charge the initial attack line with tank water, hydrant supply shall be established **before** back-up line is in place.

EVALUATION CRITERIA:

- All lines shall be completely deployed from hose beds.
- All nozzles shall be flowing minimal acceptable pressures. Solid tips; 50psi Combo tips; 100 psi
- Time begins at signal from officer until water is flowing at required pressure from both lines and supply line has been established.

RECOMMENDED MAXIMUM TIME: 3 MINUTES